

**HITACHI**  
Inspire the Next

# Hitachi Elevator

## VFI-II



# VFI-II

The VFI elevator has been reborn with the latest and most reliable Hitachi technology for a sustainable environment.

The new **VFI-II** elevator serves as an environmentally friendly transportation system to your building in addition to being reliable, safe, comfortable, of high quality and user-friendly.


## Energy conservation

A gearless traction machine with Permanent Magnet-type synchronous motor (PM motor) conserves energy by improving power efficiency.

A PM motor is also used in the drive unit for car doors and a direct drive method is employed to realize improved energy efficiency and smoother door opening and closing motions.



Gearless traction machine with PM motor  
(By 3D modeling)

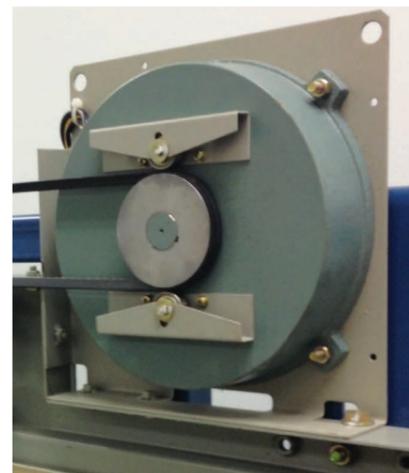

PM motor with VVVF door control

## Energy-saving features

### Automatic dimming of indication light

The brightness of the elevator hall and car position indicator is dimmed automatically after a preset duration when elevator is idle.

### Automatic turn-off of car lighting and fan

In the event that the elevator is idle, the lighting and ventilation fan in the elevator are automatically turned off to conserve energy.

### Hall and car buttons using LED light

Hall and car buttons utilize LED light which consumes less energy.

### Hall lanterns using LED light (optional)

Hall lanterns using LED light are available for your selection.

### Regenerative system (optional)


Making use of the energy generated by an elevator when traveling downwards with a heavy car load or upwards with a light car load, the traction machine acts as a power generator to transmit power back to the electrical network in the building.

### Energy saving operation control (applicable to FI-600 group control only)

As one of the standard functions of the FI-600 group control system. The operation reduces energy consumption of elevators by forecasting the traveling routes and occupancy rate of elevators during low traffic.

## Space-saving design

The **VFI-II** elevator requires a smaller machine room size through the use of slimmer traction machine, control panel and machine room equipment. This allows flexibility in building design through maximizing the usage of building space.

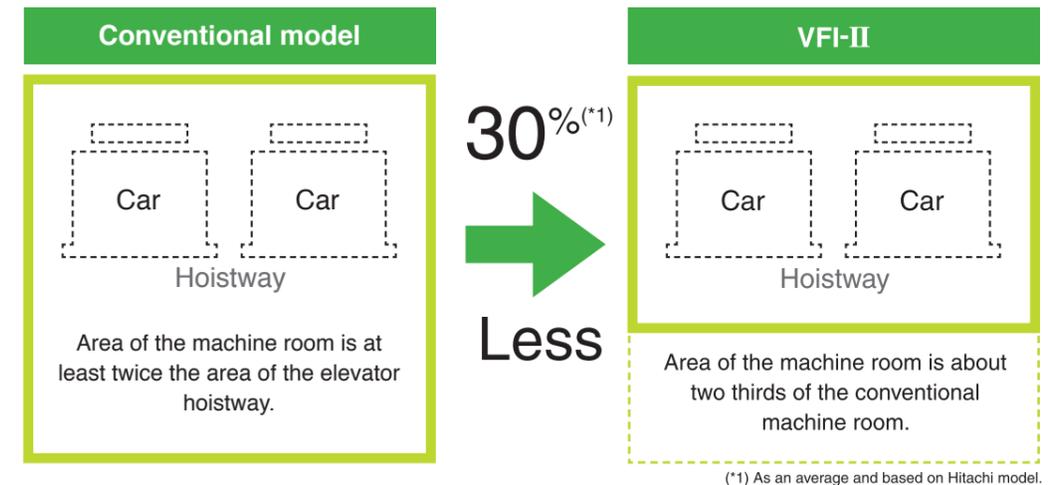


## The human touch


The **VFI-II** elevator provides a comfortable ride and appeals to different aspects of the human sense, touch, sight and hearing - by the integration of tactile button, TFT(LCD) display, voice synthesizer and multi-beam door sensor.



**Touch:** Button with Braille and tactile, and LED light (optional)

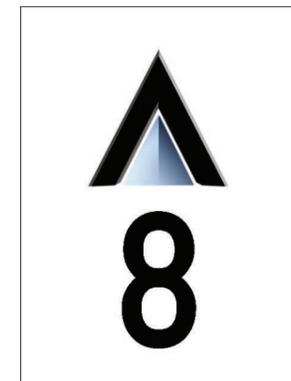

**Sight:** TFT(LCD) position indicator

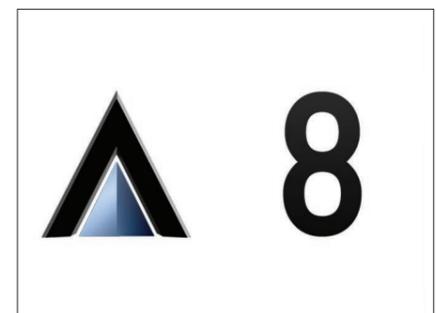

### Floor button flashing function:

The registered car destination floor button flashes when the car approaches the destination floor

### The human touch: Multi-beam door sensor

In the event where the beam paths are obstructed, this sensor, installed on the edge of the doors, will keep the doors open.

### Hearing: Voice synthesizer (optional)

Preset standard messages are announced to the passengers by a voice synthesizer.

# Standard Car and ceiling design



## CS-101S Ceiling design

Center : Milky white acrylic  
 Surrounding : Painted sheet steel  
 Lighting : Fluorescent  
 Height (from floor) : 2350mm

### Side and rear walls (3 sides)

Stainless steel hairline

### Front return panel/ car door/ transom panel

Stainless steel hairline

### Kickplate

Stainless steel hairline

### Flooring

Vinyl tile

### Door sill

Extruded hard aluminum

### Car position indicator

TFT(LCD), incorporated into car operating panel

### Ventilation

Air-blown through ceiling duct

# Standard Entrance design



## AS-1X Type Jamb

### Jamb frame

Painted sheet steel, 50mm wide

### Door panel

Painted sheet steel

### Door sill

Extruded hard aluminum



## OPE-15B Operating panel

**Face plate**  
Stainless steel hairline

**Button type**  
All types available

**Indicator type**  
TFT(LCD)




## DHP-OP13 Operating panel

**Face plate**  
Stainless steel hairline

**Button type**  
All types available

**Indicator type**  
Dot matrix

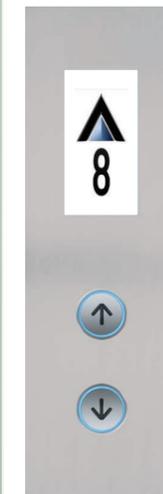

## VIB-15B Hall button with indicator

**Face plate**  
Stainless steel hairline

**Button type**  
All types available

**Indicator type**  
TFT(LCD)



## VIB-13B Hall button with indicator

**Face plate**  
Stainless steel hairline

**Button type**  
All types available

**Indicator type**  
Dot matrix

# Optional Car and ceiling designs

## Cars and ceilings



**Side and rear walls (3 sides)**  
Stainless steel hairline

**Front return panel/ car door/ transom panel**  
Stainless steel hairline

**Operating panel type**  
OPE-15B


**Kickplate**  
Stainless steel hairline

**Flooring**  
Vinyl tile

**Door sill**  
Extruded hard aluminum

**Car position indicator**  
TFT(LCD), incorporated into car operating panel

**Ventilation**  
Air-blown through ceiling duct

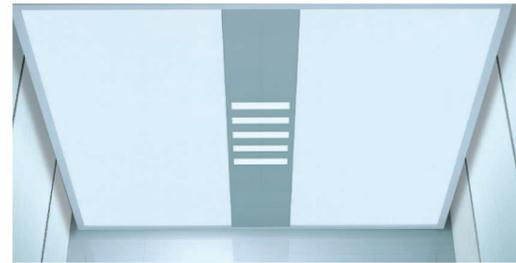


### DX-201S Ceiling design

Center : Painted sheet steel  
Both sides : Milky white acrylic  
Ceiling trim : Anodized aluminum  
Lighting : Fluorescent  
Height (from floor) : 2300mm



### DX-12S Ceiling design

Center : Painted sheet steel  
Both sides : Painted aluminum with recess  
Ceiling trim : Anodized aluminum  
Lighting : Fluorescent  
Height (from floor) : 2300mm

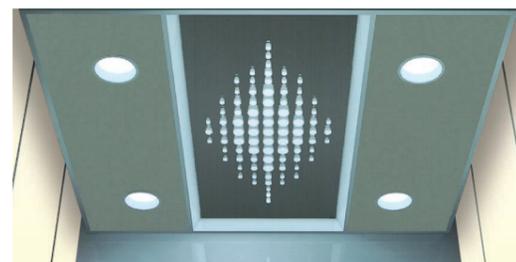

### DX-23S Ceiling design

Center : Half mirror  
Both sides : Painted aluminum with recess  
Ceiling trim : Anodized aluminum  
Lighting : Fluorescent  
Height (from floor) : 2300mm



**Side and rear walls (3 sides)**  
Stainless steel hairline

**Front return panel/ car door/ transom panel**  
Stainless steel hairline

**Operating panel type**  
OPE-15B


**Kickplate**  
Stainless steel hairline

**Flooring**  
Vinyl tile

**Door sill**  
Extruded hard aluminum

**Car position indicator**  
TFT(LCD), incorporated into car operating panel

**Ventilation**  
Air-blown through ceiling duct

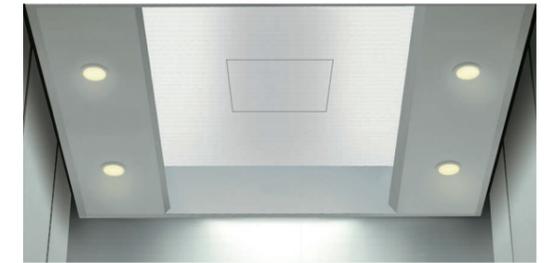

### SL-102S Ceiling design

Upper portion : Painted sheet steel (with emergency hatch)  
Both sides : Painted sheet steel  
Lighting : Fluorescent & Down light  
Height (from floor) : Upper 2470mm, Lower 2300mm



### EX-32S Ceiling design

(Applicable for car loading of 600kg and above)  
Upper portion : Painted sheet steel (with emergency hatch)  
Other portions : Painted sheet steel  
Lighting : Fluorescent  
Height (from floor) : Upper 2600mm, Lower 2300mm



### EX-403S Ceiling design

(Applicable for car loading of 600kg and above)  
Center : Milky white acrylic  
Center decoration : Painted sheet steel  
Surrounding : Painted sheet steel (with acrylic lens)  
Lighting : Fluorescent  
Height (from floor) : Upper 2425mm, Lower 2300mm

# Optional Entrance designs

## Entrances



**Jamb frame**  
**TS-1X** (wide) type,  
 painted sheet steel  
**Door panels**  
 Painted sheet steel  
**Landing sill**  
 Extruded hard aluminum



**Jamb frame**  
**SS-1X** (wide) type,  
 stainless steel mirror  
**Door panels**  
 Stainless steel mirror etched  
**Landing sill**  
 Extruded hard aluminum



**Jamb frame**  
**TL-2X** (wide) type with transom panel,  
 painted sheet steel  
**Door panels**  
 Painted sheet steel  
**Landing sill**  
 Extruded hard aluminum



**Jamb frame**  
**SL-2X** (wide) type,  
 stainless steel hairline  
**Door panels**  
 Stainless steel hairline  
**Landing sill**  
 Extruded hard aluminum

# Optional Car fixtures

## Operating panels



**OPE-15B**  
**Face plate**  
 Stainless steel hairline  
**Button type**  
 All types available  
**Indicator type**  
 TFT(LCD)




**OPS**  
**Face plate**  
 Stainless steel hairline  
**Button type**  
 All types available  
**Indicator type**  
 Dot matrix



**DHP-OP13**  
**Face plate**  
 Stainless steel hairline  
**Button type**  
 All types available  
**Indicator type**  
 Dot matrix

## Position indicator





**Buttons** (Applicable to both car and hall sides)

Stainless steel buttons	Car operating panel	Hall
<p><b>UB15S-1 (Standard)</b></p> <p>Button size: 36mm Faceplate: Stainless steel hairline Rim: Polished stainless steel</p>		
<p><b>UB15R-1 (Standard)</b></p> <p>Button size: 38mm Faceplate: Stainless steel hairline Rim: Polished stainless steel</p>		
Stainless steel buttons with tactile	Car operating panel	Hall
<p><b>UB15S-2</b></p> <p>Button size: 36mm Faceplate: Stainless steel hairline Rim: Polished stainless steel Tactile: Black Plastic</p>		
<p><b>UB15R-2</b></p> <p>Button size: 38mm Faceplate: Stainless steel hairline Rim: Polished stainless steel Tactile: Black Plastic</p>		

Stainless steel buttons with braille	Car operating panel	Hall
<p><b>UB15S-3</b></p> <p>Button size: 36mm Faceplate: Stainless steel hairline Rim: Polished stainless steel</p>		
<p><b>UB15R-3</b></p> <p>Button size: 38mm Faceplate: Stainless steel hairline Rim: Polished stainless steel</p>		
Stainless steel buttons with tactile	Car operating panel	Hall
<p><b>UB15S-4</b></p> <p>Button size: 36mm Faceplate: Stainless steel hairline Rim: Polished stainless steel Tactile: Black Plastic</p>		
<p><b>UB15R-4</b></p> <p>Button size: 38mm Faceplate: Stainless steel hairline Rim: Polished stainless steel Tactile: Black Plastic</p>		

UB15S-4 and UB15R-4 buttons comply with barrier-free accessibility code of Singapore.  
Button light up colours : Red, White, Blue, Green and Yellow.



Red(Standard)(RH)



White(WH)



Blue(BH)



Green(GH)



Yellow(YH)

# Optional Entrance fixtures

## Hall buttons with indicators



**VIB-15B**  
(For simplex operation)

**Face plate:**  
Stainless steel hairline

**Button type:**  
All types available

**Indicator type:**  
TFT(LCD)


**VIB-13B**  
(For simplex operation)

**Face plate:**  
Stainless steel hairline

**Button type:**  
All types available

**Indicator type:**  
Dot matrix

## Hall buttons

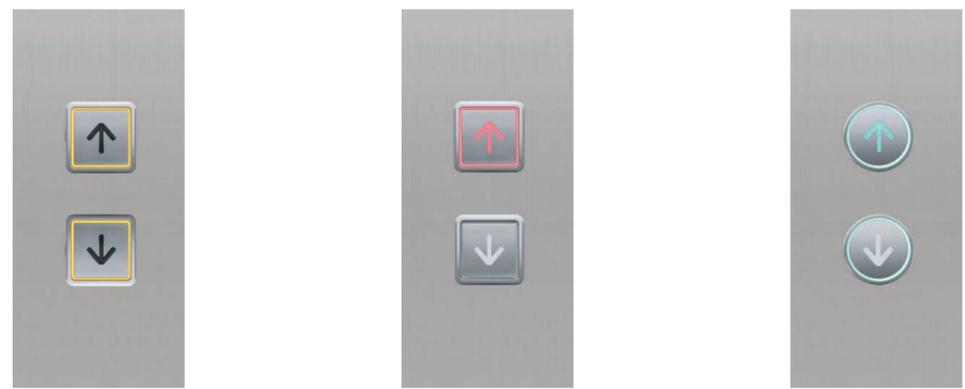

**BL(UB15S-2)**

**Face plate:**  
Stainless steel hairline

**Button type:**  
All types available

**BL(UB15S-1)**

**Face plate:**  
Stainless steel hairline

**Button type:**  
All types available

**BL(UB15R-1)**

**Face plate:**  
Stainless steel hairline

**Button type:**  
All types available

## Hall indicators



**HF-15**

**Face plate:**  
Stainless steel hairline

**Indicator type:**  
TFT(LCD)



**HSDX**

**Face plate:**  
Stainless steel hairline

**Indicator type:**  
Dot matrix



**HLS-025SD**

**Indicator with hall lantern**

**Face plate:**  
Stainless steel hairline

**Indicator type:**  
Dot matrix

## Hall lanterns



**VLS-115S**

**Vertical hall lantern**

**Face plate:**  
Stainless steel hairline

**VLS-025S**

**Vertical hall lantern**

**Face plate:**  
Stainless steel hairline

**VLS-90S**

**Vertical hall lantern**

**Face plate:**  
Stainless steel hairline



**HLS-025S**

**Horizontal hall lantern**

**Face plate:**  
Stainless steel hairline



**L-03**

**Horizontal hall lantern**

**Face plate:**  
Stainless steel hairline

# Intelligent group control system


## VFI-II comes with Hitachi's new group control system, FI-600

Shortening waiting times and reducing the probability of a long wait<sup>(2)</sup> are always the most critical concerns of group control systems.

Hitachi has been striving for the development of control algorithms to address these concerns. A new algorithm, "Future reference-trajectory control" is used for the FI-600.


The probability of a long wait<sup>(2)</sup> is minimized by operating elevator cars at equal time intervals while forecasting future trajectories.

## Evolution of Hitachi's group control systems

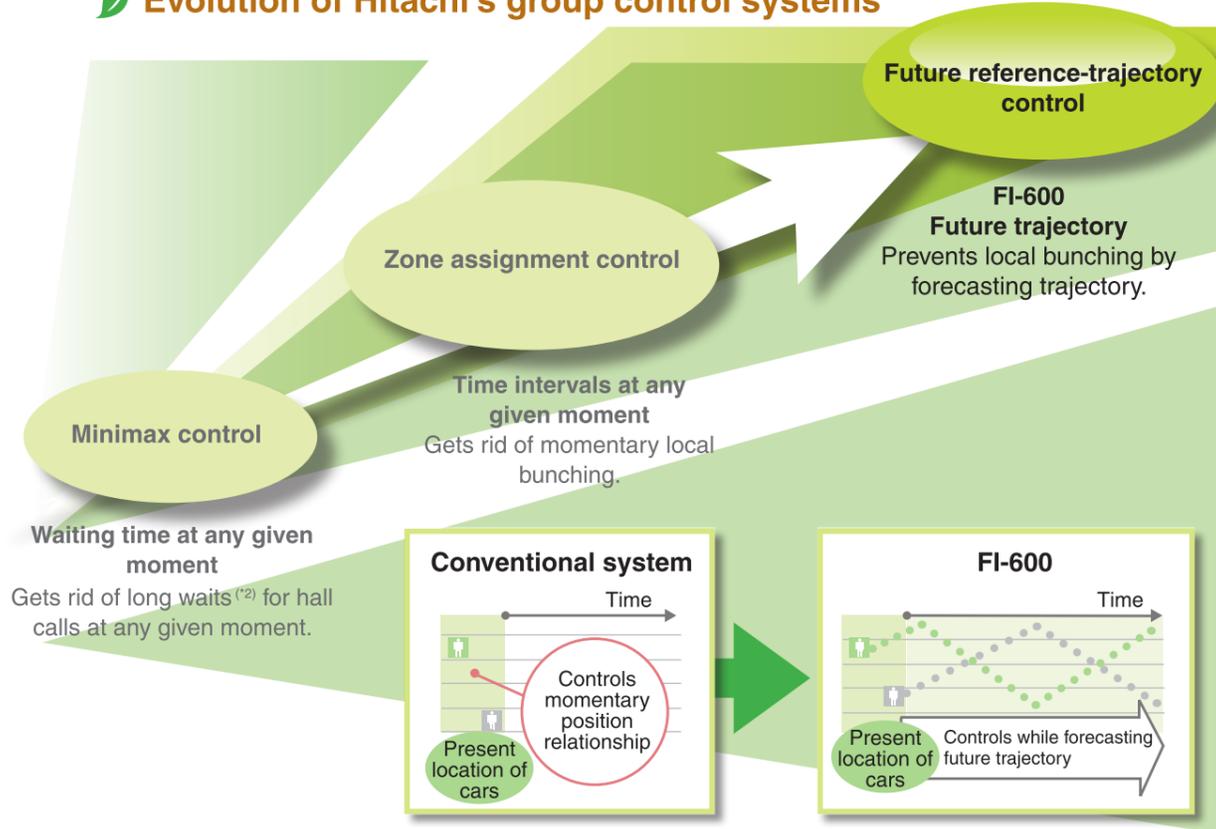

## With our proprietary algorithm, "Future reference-trajectory control", changes in traffic demand are taken into account.

A future reference-trajectory control algorithm that forecasts the future trajectory of elevator cars is implemented in FI-600. FI-600 is a next-generation elevator group supervisory control system using advanced forecasting trajectory technique, by means of a high performance RISC\* micro-controller and intelligent processing application technology.

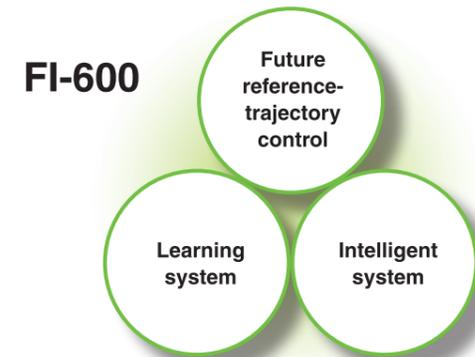

Using this algorithm, you can determine and configure the optimum trajectory by taking into account not only the past and present usage data, but also the trend of future traffic demand. This allows the system to cope with the change in status flexibly and quickly, optimizing the allocation and operation of elevator cars for every user.

\*RISC: Stands for Reduced Instruction Set Computer. It is a microprocessor that implements high-speed operation with a small number of simple instructions.


## What is future reference-trajectory-control?

Generally speaking, a group of elevator cars must be operated at equal time intervals to minimize passenger waiting times, but in heavy traffic conditions, cars are frequently operated in a bunch, or all cars would end up clustering around the same level on their way and moving in the same direction in unison. In the conventional group control method, the most available cars at that moment are allocated to hall calls to eliminate local bunching, but when heavy traffic conditions are prolonged, this state cannot be completely eliminated, resulting in long waiting times. In contrast, with future reference-trajectory control, elevator cars are controlled by taking into account their forecasted trajectories, allowing shorter passenger waiting times and reducing the probability of a long wait<sup>(2)</sup>.


## Major advantages of FI-600

The FI-600 controls the fluctuation in waiting times, thereby shortening the average waiting times, reducing the probability of a long wait<sup>(2)</sup> during heavy traffic, and improving the "quality of waiting times" of users.

## Reduce average waiting time by as much as 10%<sup>(1)</sup>

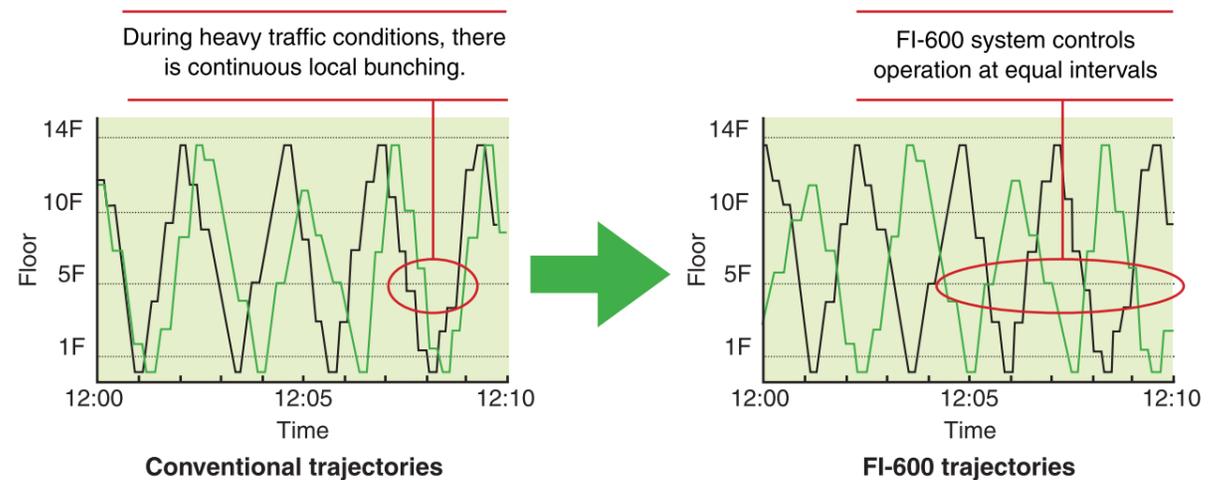

## Reduce probability of a long wait<sup>(2)</sup> by up to 12%<sup>(1)</sup>

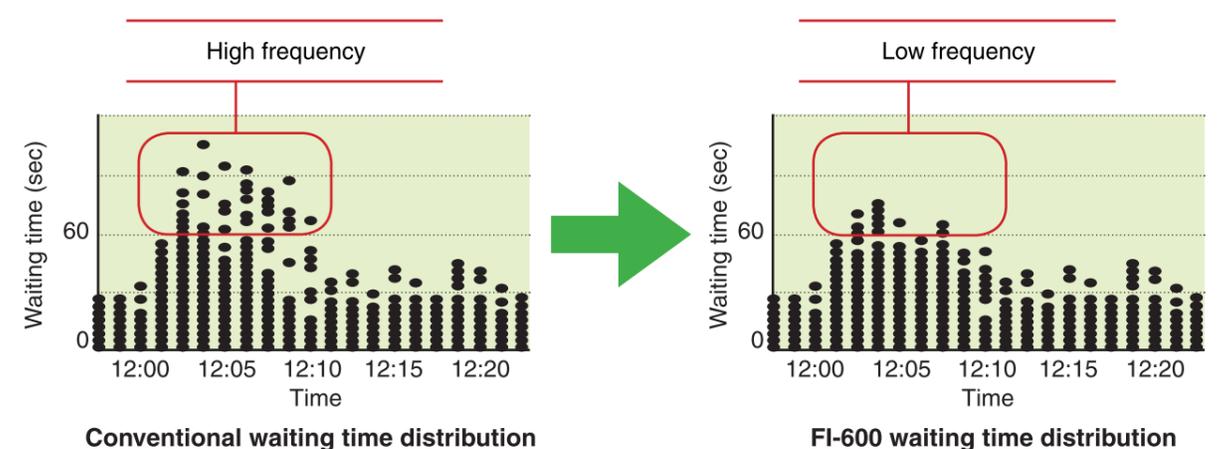

(1) Comparison is based on Hitachi's conventional group control system.  
(2) "Long wait" is defined as waiting times of more than 60 seconds.

# FI series group control system

## Basic functions

- Standard specification
- ▲ Optional specification
- Not applicable

No.	Function	Description	FI series			
			600	100	10	
1	Instantaneous reservation and service forecasting (FI-IRF)	Upon receipt of a hall call, this function activates an elevator to serve this call, and at the same time the call is acknowledged by the hall lantern and chime.	●	—	—	
2	Arrival notice indication (FI-ANI)	Four to five seconds prior to the arrival of an elevator, this function will activate the hall lantern flickering and the chime sound.	●	●	▲	
3	Basic call assignment control	Future reference-trajectory control (FI-FRTC)	Controls the allocation of elevator cars to hall calls according to the future reference trajectory resulting from learning-based daily traffic flows.	●	—	—
4		Reference-trajectory control (FI-RTC)	Controls the allocation of elevator cars to hall calls based on the theory used in the highest model in the FI series, FI-600, and the intelligent-based data containing our know-how accumulated over a long period of time.	—	●	—
5		Ring control (FI-RC)	Allocates an elevator car closest to the floor where a new hall call is made.	—	—	●
6	Bunching prevention (FI-BP)	This function prevents local bunching of elevator cars using the "future reference-trajectory control" or the "reference trajectory control" for operating cars at equal time intervals.	●	●	—	
7	Learning function	Collection of usage data (FI-CUD)	Collects the traffic status information by floor and direction for a unit time based on the elevator information such as car positions and the number of passengers getting on and off, and hall call information.	●	●	—
8		Recognition of traffic flow mode (FI-RTM)	Extracts characteristics at any given moment, including congested floors, from the collected usage data, and identifies the traffic flow mode at that moment.	● 40 mode	● 2 mode	—
9		Search for optimum operation program (FI-SOP)	Searches the optimum operation program of the moment based on the identified traffic mode.	●	●	—
10	Congested floor recognition (FI-CFR)	Identifies congested floors according to the usage data learned in each traffic flow mode.	●	—	—	
11	Service forecasting for hall call assignment (FI-SFH)	This function assigns elevator cars to hall calls more precisely by forecasting the arrival time and number of passengers in the car according to the learning-based traffic demand.	●	—	—	
12	Intelligent function	Generation of new traffic flow modes (FI-GNT)	Extracts new characteristics according to the learning-based usage data, and registers them as a building-specific new traffic flow mode.	●	—	—
13		Generation of optimum operation programs (FI-GOP)	Generates an optimum operation program for a building by simulating the elevator operation according to the usage data learned in each traffic mode and preferential control target.	●	—	—
14	Energy-saving preference control (FI-ESC)	This system reduces the number of elevator cars in service when traffic demand is low.	●	—	—	
15	Floor standby control	Forecasting dynamic allocation control (FI-FDA)	Dynamically allocates elevator cars in response to continuously changing situations in the building by determining the area assigned to each car according to the forecasted number of passengers and car usage.	●	—	—
16		Zone distribution control (FI-ZD)	Distributes the idle elevator cars to the pre-assigned zones.	—	●	—
17		Fixed floor distribution control (FI-FD)	Distributes the idle elevator cars to the pre-assigned floors.	—	—	●
18	Learning-based concentrated service (FI-LCS)	Centralizes the service to the learning-based congested floors during peak times including morning, lunch time and evening peaks while taking the service for other floors into account.	●	—	—	
19	Automatic door open time control (FI-ADT)	This function automatically controls the duration of the door open time according to the floor and the kind of call (hall call or car call) as well as the elevator condition.	●	●	—	

## Operating functions

- Standard specification
- ▲ Optional specification
- Not applicable

No.	Function	Description	FI series		
			600	100	10
20	Centralized control for special floors (FI-CCF)	This function preferentially assigns an elevator to the special floor (e.g. the director's room).	▲	—	—
21	Service floor selection (FI-SFS)	Allows the operator to select the service and non-service floors using, for example, the switches on the control panel.	▲	▲	—
22	VIP service <sup>(*)</sup> (FI-VIP)	When welcoming or sending off important guests, this function permits an elevator to be summoned directly to the desired car call floor by pushing a specially provided hall button.	▲	▲	▲
23	Closest car priority service (FI-CPS)	When a hall call button is pressed, the elevator car in the shaft closest to the hall call floor is preferentially dispatched.	▲	▲	—
24	Scheduled reservation system (FI-SRS)	Allows the operator to schedule various elevator services in the building, including the reassignment of service floors, centralized service and priority service, at a specific date and time (setting through XEMS is also possible).	▲	—	—
25	Zoning express service (FI-EZS)	Starts a divided express service when the peak traffic demand takes place in the preset time zones.	▲	—	—
26	Independent automatic operation <sup>(*)</sup> (FI-IAO)	This operation allows an elevator to be separated from the group supervisory control and operate independently by pre-installed separate hall buttons.	▲	▲	▲
27	Destination floor reservation system "FIBEE" (FI-DFRS)	Allows the passenger to preselect the destination floor on the destination floor panel installed at the landing hall. This reduces button operations to one, improving the operability.	▲	—	—

(\*1) Not applicable for (FI-DFRS)

## Man-machine functions

No.	Function	Description	600	100	10
28	Hall information (FI-HI)	General and elevator operation information is indicated on the LED or LCD hall indicator.	▲	▲	—
29	Car information (FI-CI)	Information useful for passengers is presented on the LED or LCD car indicator.	▲	▲	—
30	Traffic follow door control (FI-TFDC)	The door open time is adjusted by detecting passengers getting on and off with multiple infrared light beams that cover the full height and width of elevator doors.	●	▲	▲

## System backup functions

No.	Function	Description	600	100	10
31	Group management A.I. microprocessor malfunction recovery system (FI-AMR)	If the A.I. micro-processor malfunctions, this system will allow hall call assignments to be carried out by choosing from standard modes of traffic flow.	●	—	—
32	Group management operation microprocessor malfunction recovery system (FI-OMR)	When the active micro-controller in the dual system fails, the standby micro-controller takes over the group control to continue operation.	●	—	—
33	Hall call circuit malfunction recovery system (FI-HMR)	In the event that the associated hall call button is not responsive, other hall call buttons located on the same floor can be used for registering hall calls.	●	●	●
34	Group management control system malfunction recovery system (FI-GMR)	When the group management control system malfunctions, this system activates the "skip/ stop" operation for all elevators, covering either the odd number or even number floors with respect to the lowest floor.	●	●	—
35	Individual signal or control microprocessor malfunction recovery system (FI-SMR)	When individual control microprocessor malfunctions, or when miscommunication is detected, this system isolates the elevator from the group management control immediately.	●	●	●
36	Individual control malfunction recovery system (FI-CMR)	If the hall call is not responded to for a certain period of time due to, for example, a fault in the mechanical shoe of the door, the failed section is disconnected from the group control until normal operation is resumed.	●	●	●

# Operating systems and functions

Depending on your requirements and the number of elevators in a group, customers can choose from a range of collective control systems, group control systems (including FI-series group control system) and operating systems. There are also basic and optional functions which you can choose from, depending on the building type and building requirements.

## Operating systems

Legend STD: Standard  
OPT: Optional

No.	Name	Description	STD	OPT
1	Simplex collective control (CCTL)	This is a fully automatic operation used for a single elevator system. Hall calls in the direction in which the elevator is travelling are responded to sequentially and when all calls in that direction are cleared, calls in the opposite direction are responded to. When there are no more calls, the elevator will stop at the last floor served.	●	
2	Duplex collective control (DCTL)	This is a fully automatic operation used for a two-elevator system. Hall calls are responded to by whichever elevator that can serve the hall call faster. When there are no more calls, one of the elevators will stand-by at the start floor while the other elevator will stay at the last floor served.		●
3	Group control	FI-600 This is a group control system used to operate three to eight elevators in a large-sized building. This control system consists of 3 smart systems; "future reference-trajectory control", "learning system" and "intelligent system".		●
4		FI-100 This is a group control system used to operate three to six elevators in a medium-sized building. This control system uses "reference-trajectory control", which is based on the theory used in the highest model of the "future reference-trajectory control".		●
5		FI-10 This is a simplified group control system used to operate three or four elevators. The system provides a ring control to allocate the elevator car closed to the floor where a new hall call is registered.		●
6	Down collective control (DWCC)	For this system, all floors have "down" call buttons only, except for the start floor, where there is "up" call button only. The other operations are the same as in selective-collective and duplex selective-collective operations.		●
7	Attendant operation(ATT)	For this system, the stop floor is manually set by an attendant, such as in a department store.		●
8	Independent operation (INOC)	This operation system is used when there is a need to serve special passengers. Under this operation, all hall calls are disabled for the elevator and it is reserved for exclusive use of the special passengers.		●

## Service functions

Legend STD: Standard  
OPT: Optional

No.	Name	Description	STD	OPT
1	Mischievous call cancellation (MCCC)	In the event that a large number of calls is registered by a small number of passengers, the calls are determined to be mischievous and will be automatically cancelled upon responding to the next call. This thus eliminates unnecessary stops.	●	
2	Automatic door open time adjustment(DTAD)	The duration of the door open timing is tailored to usage conditions, substantially improving operational efficiency.	●	
3	Floor "deselect" function (FDSF)	This function allows passenger to cancel the selection of a floor which is accidentally pressed by pressing the button again. (This thus eliminates unnecessary stops.)	●	
4	Automatic return function (ARTF)	After all the calls have been served, the elevator will return to the start floor for stand-by.	●	
5	Car floor button flashing (CCBF)	The registered car destination floor button flashes when the car approaches the destination floor.	●	
6	Door open prolong button(DOPB)	In the event that this button on the car operation board is pressed, the elevator doors remain open for a pre-set period of time.		●
7	Automatic bypass Operation(ABPO)	In the event that the elevator is fully loaded, this operation will not respond to any hall calls and will only respond to the car calls.		●
8	Keypad sub-operating board(KSOP)	In order to comply with the barrier-free code, especially for high-rise buildings, individual car call buttons can be replaced by a keypad system.		●
9	Sub-operating panel (SOPB)	Additional floor selection and door open/close buttons are located on the opposite side of the main operating panel in the elevator. This will be extremely convenient during rush hours.		●
10	Voice synthesizer (VSYS)	Preset standard messages are announced to the passengers by a voice synthesizer.		●
11	Arrival signal(ASGN)	An electronic chime (located at the top and bottom of the elevator) will be sound just before the arrival of the elevator.		●
12	Interfacing with BGM speaker (BGMS)	A speaker for background music and public announcements for the building can be installed in the elevator. (Music and announcement systems, including wiring, is to be provided by others)		●
13	Emergency Battery Operated Power Supply(EBOPS)	In the event of a power failure, this emergency supply will allow the operation of a light, fan and alarm bell.		●

## Safety functions

Legend STD: Standard  
OPT: Optional

No.	Name	Description	STD	OPT
1	Multi-beam door sensor(MBDS)	In the event that the beam paths are obstructed, this sensor, installed at the edge of the doors, will keep the doors open.	●	
2	Door safety return system (ORS)	In the event of door overload, such as when passengers get their fingers, hands or personal belongings caught in the door, this system automatically senses this and either re-closes or re-opens the doors to prevent injury.	●	
3	Interphone system(INPS)	An interphone system is provided for emergency communication between the elevator and the master unit (in the supervisory panel, etc.).	●	
4	Car emergency lighting(CEML)	In the event of a power failure, an emergency light inside the elevator will be automatically activated.	●	
5	Nearest landing operation(NLNO)	In the unlikely event of temporary trouble during operation, the elevator automatically goes to the nearest floor at a low speed and doors will open to prevent passengers from being trapped inside.	●	
6	Overload detection system(OLDS)	In the event of overloading, this system will activate an audio/ visual signal to prevent the elevator from moving.	●	
7	Door safety edge (both sides or one side)(DSEB)	Mechanical safety units are installed on both sides or one side of the elevator doors. In the event of passengers coming into contact with the safety edges of closing doors, the doors will immediately reopen.		●
8	3D door safety device(3DDS)	This device detects passengers getting on or off the elevator, keeping the doors open as long as passengers are within the area of detection		●
9	Abnormal speed protection function(ASPF)	In the event that the elevator is moving downwards at an abnormally high speed, the breakers will be automatically engaged and the elevator will cease operation.	●	
10	Out of door-open zone alarm (ASOZ)	In the event that the elevator stops out of the door open zone of a selected floor, doors will not open, and an alarm will be sounded in the elevator.	●	
11	Overvoltage detection system, (OVDS)	When an abnormal increase in power supply to the elevator system is detected, the power supply will be cut off to prevent damages to the elevator equipment.		●
12	Fire rated landing door	2 hours fire rated landing door are available where required		●

## Management functions

Legend STD: Standard  
OPT: Optional

No.	Name	Description	STD	OPT
1	Automatic turn-off of elevator light and fan(ATFL)	In the event that the elevator is not in use, the light and ventilation fan in the elevator are automatically turned off to conserve energy.	●	
2	Maintenance operation(MTNO)	In the event that elevator maintenance is being carried out, the elevator operates at a lower speed.	●	
3	Parking operation(PKGO)	The elevator can be parked at the designated floor with a key switch.		●
4	Rush-hour schedule operation(RHSO)	All the elevators will automatically return to the start floor, after serving the last call during this preset rush-hour timing.		●
5	Floor lock-out operation(FLLO)	Specific service floors can be locked-out by activating a switch.		●
6	Floor lock-out operation by cipher code (ROCC)	By inputting a pre-programmed code using the car operating board floor buttons, passengers can gain access to certain restricted floors.		●
7	Intelligent operation security system (IPSS)	This function allows controlled access to certain floors by means of a password or ID cards. Note: Keypad or ID card-reader system is to be provided and installed by others. Interfacing shall be by means of dry (voltage-free) contacts.		●
8	Interfacing with closed-circuit TV (CCTV)	This system enables the security personnel to monitor the movement inside the elevator. This will be effective in preventing criminal and mischievous acts inside the elevator. (CCTV system, including wiring, is to be supplied by others.)		●
9	Supervisory panel(SVP)	This panel provides various supervisory operations, including communication and status monitoring.		●
10	Elevator monitoring system (EMS)	This system shows the real time situation of the elevators such as the elevator position, movement direction and abnormal operation on the PC (Personal Computer) display. It is also possible to turn on/off the elevators and change the service floors of the elevators using the PC.		●
11	Interfacing to building management system (BMS)	This interfacing shall be done by means of electrical dry contact to the building management system for their monitoring.		●
12	Regenerative system (RGNS)	When traveling downwards with a heavy car load or upwards with a light car load, the traction machine acts as a power generator to transmit power back to the electrical network in the building.		●

## Operating systems and functions

### Emergency operations

Legend STD: Standard  
OPT: Optional

No.	Name	Description	STD	OPT
1	Earthquake emergency operation (EEMO)	In the event that an earthquake is detected, the elevator will stop at the nearest floor. (This function is not applicable to private lobby layouts.)		●
2	Fire emergency operation(FEMO)	In the event of fire, the elevator is automatically brought to the designated floor where it remains inoperative for passengers' safety.		●
3	Emergency operation for power failure (EPFO)	In the event of building power failure, the elevator can be operated by the building standby generator to move the elevator to the designated floor.		●
4	Automatic rescue device for power failure (ALP)	In the event of building power failure, the elevator automatically switches to battery power to bring itself to the nearest floor. (This function is not applicable to private lobby layout buildings.)		●
5	Fireman operation(FMNO)	In the event that the fireman switch is turned on, the elevator returns to the designated floor and will be ready for firemen's use.		●

## List of designs and finishes

### Car designs

Legend STD: Standard  
OPT: Optional

No.	Item	Finishes/ Designs/ Types	STD	OPT	
1	Ceiling	CS-Series (CS-101S)	●		
2		DX-Series (DX-201S) (DX-12S) (DX-23S)		●	
3		SL-Series / EX-Series (SL-102S) (EX-32S) (EX-403S)		●	
4	Car Wall (3 sides)	Painted Sheet Steel	●		
5		Stainless Steel Hairline		●	
6		Stainless Steel Non-directional Hairline		●	
7		Stainless Steel Hairline Etched (Hitachi Standard Pattern)		●	
8	Front Return Panel and Transom Panel	Stainless Steel Hairline	●		
9		Stainless Steel Non-directional Hairline		●	
10		Stainless Steel Hairline Etched (Hitachi Standard Pattern)		●	
11		Stainless Steel Mirror		●	
12	Car Door	Stainless Steel Hairline	●		
13		Stainless Steel Non-directional Hairline		●	
14		Stainless Steel Hairline Etched (Hitachi Standard Pattern)		●	
15		Stainless Steel Mirror		●	
16	Kickplate (3 sides)	Stainless Steel Hairline	●		
17	Sill	Extruded Hard Aluminum	●		
18	Operating Panel	Position Indicator	Stainless Steel Hairline with TFT (LCD) Indicator (OPE-15B)	●	
19			Stainless Steel Hairline with Dot Matrix Indicator (DHP-OP13)	●	
20			Stainless Steel Hairline with Dot Matrix Indicator (OPS)		●
21		Button	Stainless Steel Face Plate without Braille (UB15S-1) (UB15R-1)	●	
22			Stainless Steel Face Plate without Braille (UB15S-2) (UB15R-2)		●
23		Stainless Steel Face Plate with Braille (UB15S-3) (UB15R-3) (UB15S-4) (UB15R-4)		●	

## List of designs and finishes

### Entrance designs

Legend STD: Standard  
OPT: Optional

No.	Item	Finishes/ Designs/ Types		STD	OPT	
1	Jamb Frame	Narrow Type (AS-1X)	Painted Sheet Steel	●		
2			Stainless Steel Hairline		●	
3			Stainless Steel Non-directional Hairline		●	
4			Stainless Steel Mirror		●	
5		T-Wide Type	Without Transom Panel (TS-1X)	Painted Sheet Steel		●
6				Stainless Steel Hairline		●
7			With Transom Panel (TL-2X)	Stainless Steel Non-directional Hairline		●
8				Stainless Steel Mirror		●
9		S-Wide Type	Without Transom Panel (SS-1X)	Painted Sheet Steel		●
10				Stainless Steel Hairline		●
11			With Transom Panel (SL-2X)	Stainless Steel Non-directional Hairline		●
12				Stainless Steel Mirror		●
13	Sill	Extruded Hard Aluminum		●		
14	Door	Painted Sheet Steel		●		
15		Stainless Steel Hairline			●	
16		Stainless Steel Non-directional Hairline			●	
17		Stainless Steel Hairline Etched (Hitachi Standard Pattern)			●	
18		Stainless Steel Mirror			●	
19		Stainless Steel Mirror Etched (Hitachi Standard Pattern)			●	
20	Hall Button and Indicator (*1)	Incorporated Type	Clip/Screw Type with TFT(LCD) (VIB-15B) (VIB-15BD)	●		
21			Clip/Screw Type with Dot Matrix (VIB-13B) (VIB-13BD)	●		
22		Button	Clip/Screw Type (BL)		●	
23		Indicator	Clip/Screw Type with TFT(LCD) (HF-15)		●	
24	Clip/Screw Type with Dot Matrix (HSDX) (HLS-025SD)			●		
25	Hall Button	Stainless Steel Surface Plate without Braille (UB15S-1) (UB15R-1)		●		
26		Stainless Steel Surface Plate without Braille (UB15S-2) (UB15R-2)			●	
27		Stainless Steel Surface Plate with Braille (UB15S-3) (UB15R-3) (UB15S-4) (UB15R-4)			●	
28	Hall Lantern	Vertical Type (VLS-115S) (VLS-025S) (VLS-90S)			●	
29		Horizontal Type	(HLS-025S) (L-03)			●
30			(HLS-025SD)			●

(\*1) Hall indicator is not recommended for group control system FI-100 and FI-600.





# Entrance details

(For two panel center opening door)



## SS-1X type jamb (optional)

-  Building structure (by other contractors)
-  Wall and floor finishing (by other contractors)
-  Grouting (by other contractors)

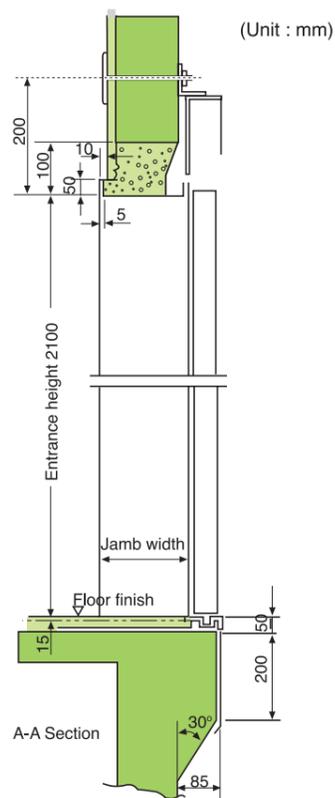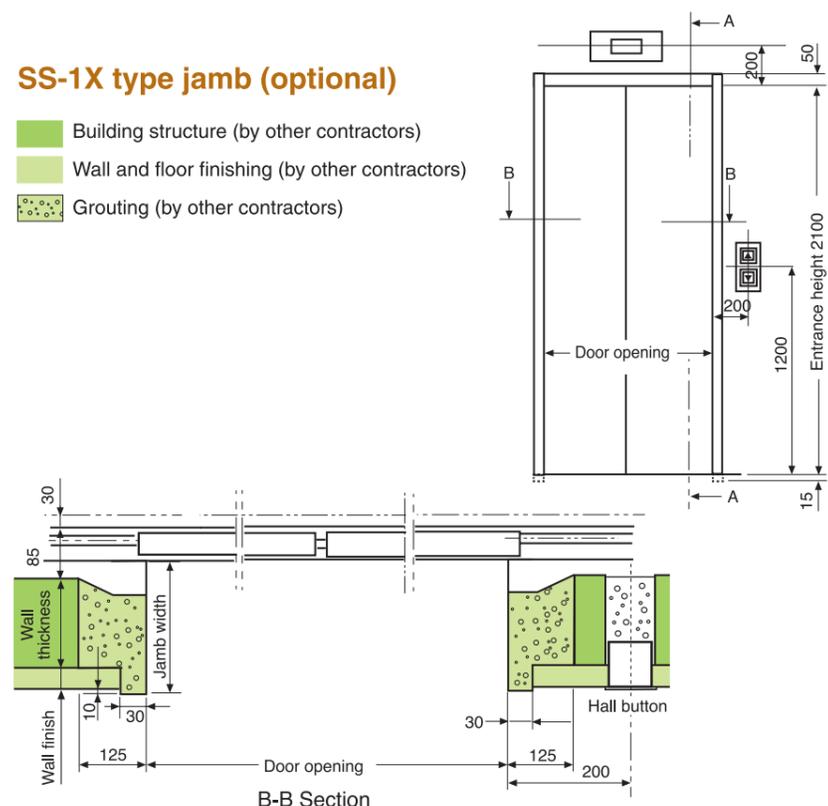


## TL-2X type jamb (optional)

-  Building structure (by other contractors)
-  Wall and floor finishing (by other contractors)
-  Grouting (by other contractors)

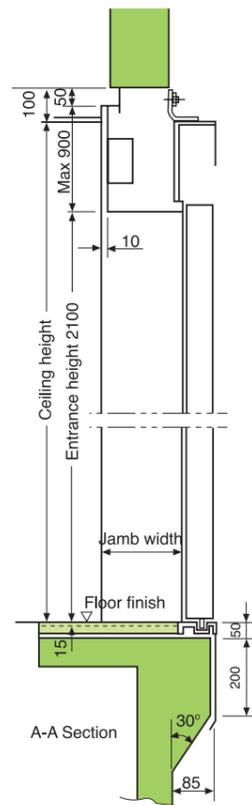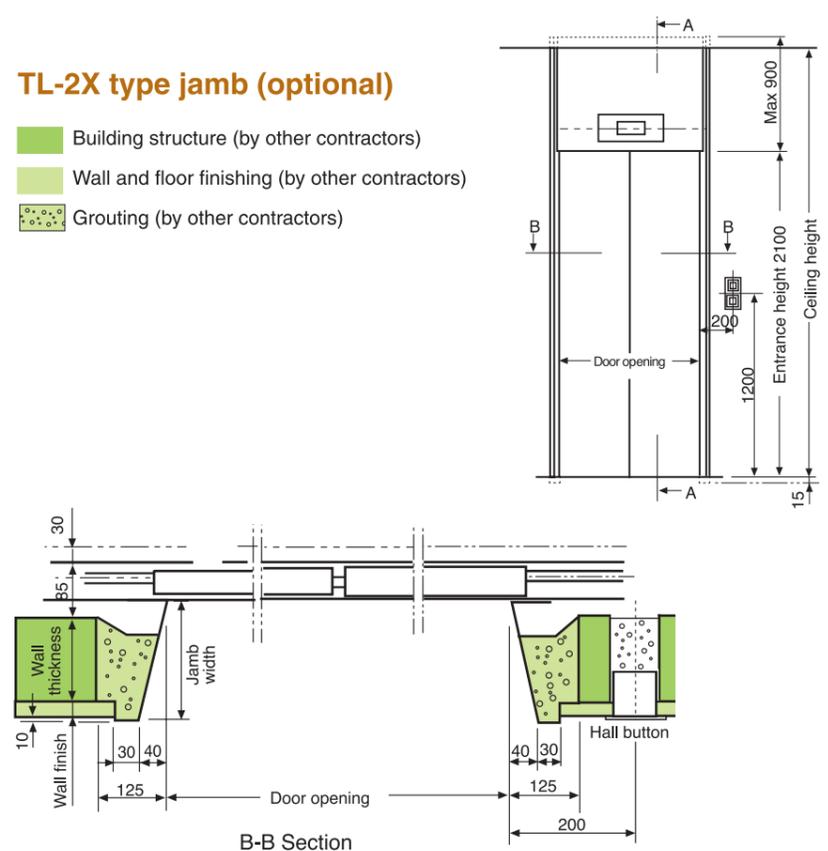

## SL-2X type jamb (optional)

-  Building structure (by other contractors)
-  Wall and floor finishing (by other contractors)
-  Grouting (by other contractors)

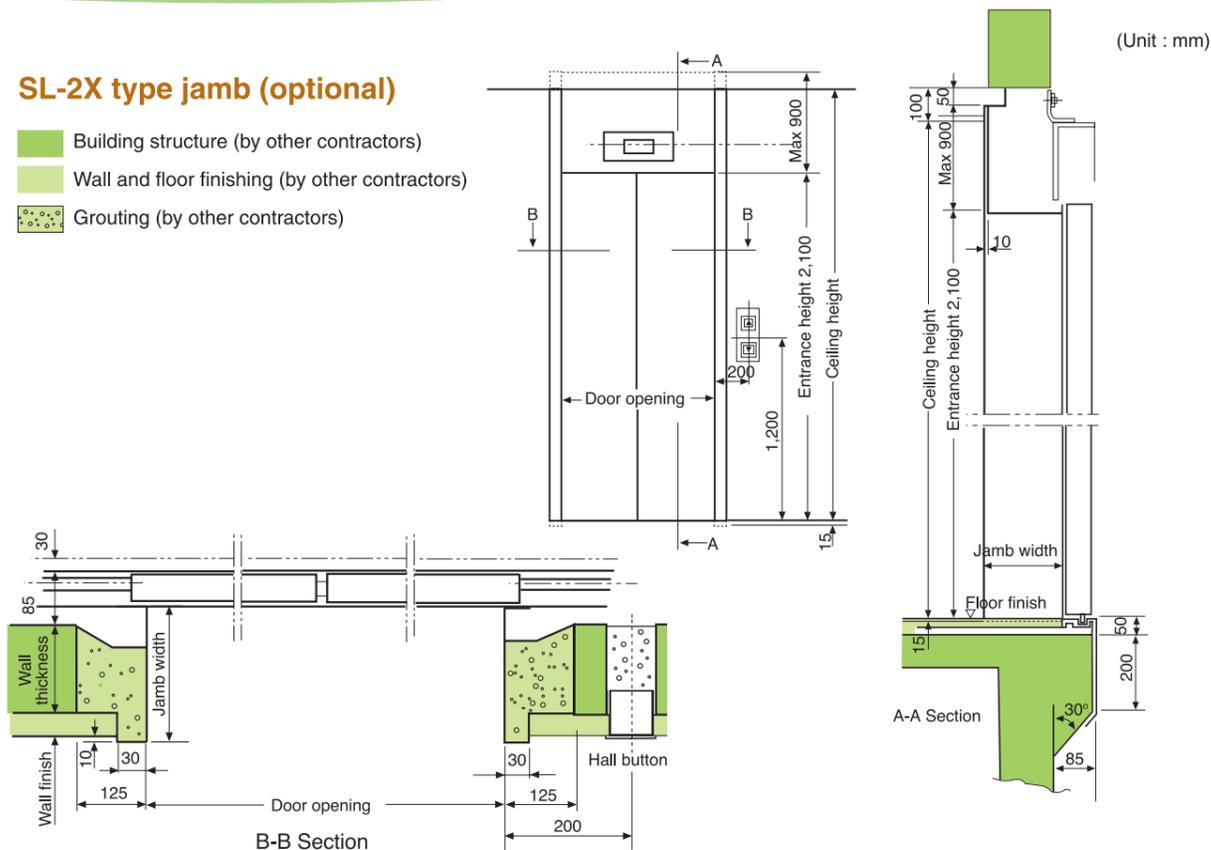


## Work to be done by building contractors

The preparatory work for elevator installation outlined in below table should be undertaken by building contractors in accordance with Hitachi drawings and in compliance with local or relevant codes and regulations.

1. Prepare hoistway with proper framing and enclosure, suitable pit of proper depth with drains and waterproofing if required, properly lit and ventilated machine room of adequate size with concrete floors, access doors, ladders and guards as required.
2. Provide and/ or cut all necessary holes, chases, and openings and finishes after equipment installation.
3. Supply and secure all supports, reinforced concrete slabs, etc., necessary for installation of the machinery, doors, buffers, etc.
4. Furnish all necessary cement and/or concrete for grouting-in of brackets, bolts, machine beams, etc.
5. Prepare and erect suitable scaffolding and protective measures for the work in progress.
6. Furnish mains for three-phase electric power and single-phase lighting supply to machine room, following the instructions of the elevator contractor on outlet position and wire size.
7. Provide, free of charge, a suitable theft-proof storage area for materials and tools during erection work.
8. Supply electric power for lighting of work area, installation work, elevator testing and spray painting.
9. Hoisting hook for loading shown on page 26 at top of the machine room.

# Hoistway and machine room layout

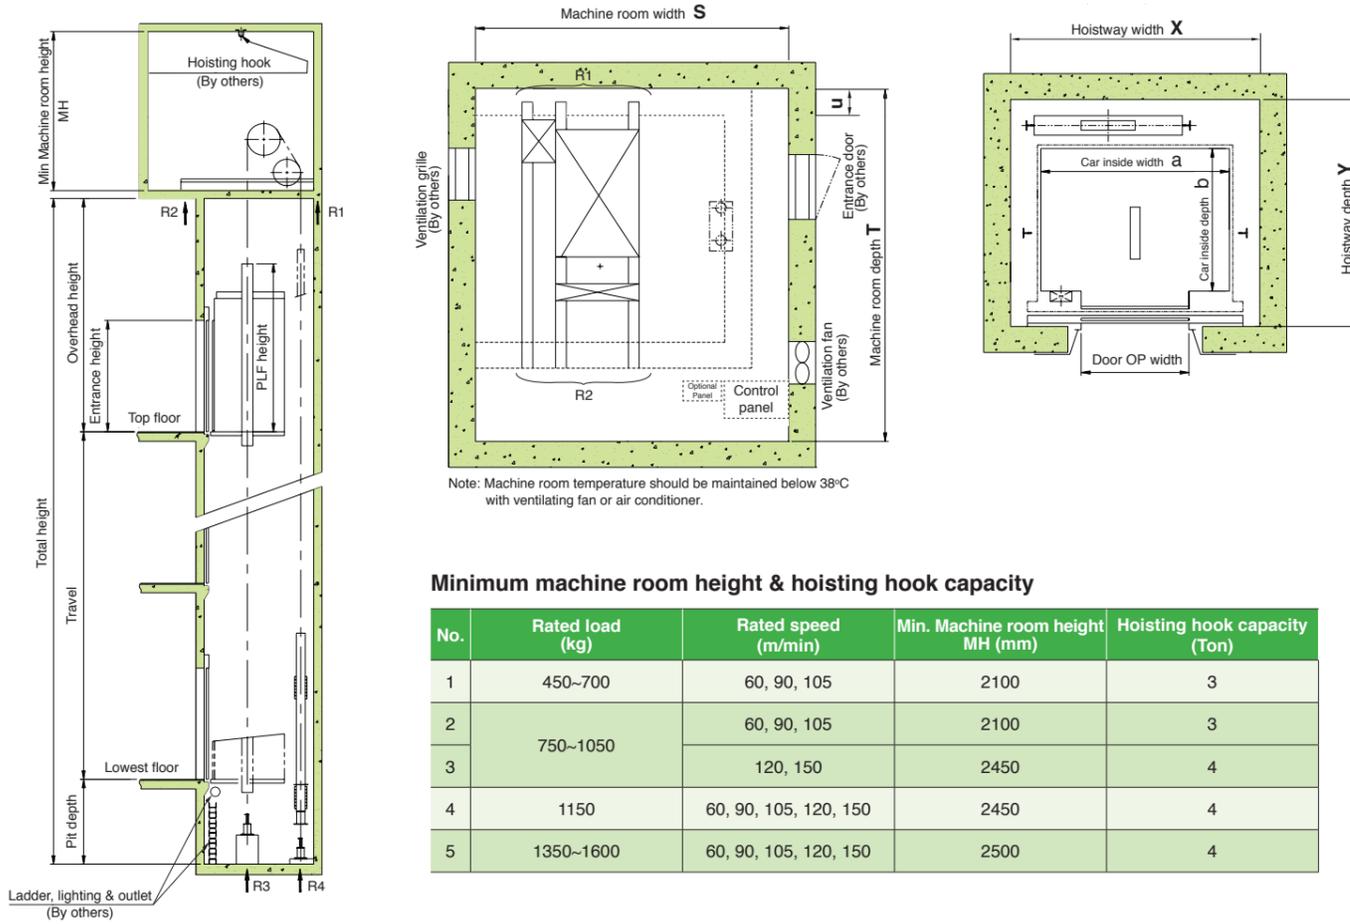

**Minimum machine room height & hoisting hook capacity**

No.	Rated load (kg)	Rated speed (m/min)	Min. Machine room height MH (mm)	Hoisting hook capacity (Ton)
1	450~700	60, 90, 105	2100	3
2	750~1050	60, 90, 105	2100	3
3		120, 150	2450	4
4	1150	60, 90, 105, 120, 150	2450	4
5	1350~1600	60, 90, 105, 120, 150	2500	4

**Minimum dimensions for overhead height, pit depth and other specifications**

No.	Rated load (kg)	Rated speed (m/min)	Travel (m)	Overhead height (mm) <sup>(*)</sup>			Pit depth (mm)	Maximum number of stops	Minimum floor to floor height (mm)	
				SS550/India/Hitachi Std	EN81-1/Malaysia/HKG COP	KFB				
1	450	60	Travel ≤ max.60	4450	4450	4550	1500	16	2700	
2	550~700	60	Travel ≤ max.60	4450	4450	4550	1500	16		
3		90	Travel ≤ max.100	4550	4550	4700	1600	32		
4		105		4600	4600	4750				
5		750~1050	60	Travel ≤ max.60	4450	4450	4550	1500		16
6	90		Travel ≤ max.100	4550	4550	4700	1600	32		
7	105			4600	4600	4750				
8	120			Travel ≤ 100	5100	5050		1900		40
9	150		100 < Travel ≤ max.140	2050						
10	1150~1350		60	Travel ≤ max.60	4850	4850	1650	16		
11			90	Travel ≤ max.100	4950	4950	1750	32		
12		105	5100		5100	1850				
13		120	Travel ≤ 100		5100	5050	2050			
14		150	100 < Travel ≤ max.140	2300						
15		60	Travel ≤ max.60	4850			4850	1750		16
16	1600	90	Travel ≤ max.100	4950	5050	1850	32			
17		105		5100	5100	1950				
18		120	Travel ≤ 100	5100	5050	2050	40			
19		150	100 < Travel ≤ max.140			5200		5100		2450
18			Travel ≤ 100			5300		5200	2250	
19	100 < Travel ≤ max.140	5400	5300	2600						

(\*) Minimum overhead height shall be increased by 350mm if car inside depth is less than 1100mm and additionally increase by 200mm if the ceiling design is EX-series type.



# HITACHI

## Inspire the Next

Ⓢ Hitachi Elevator Asia Pte. Ltd.  
10 Toh Guan Road East  
Hitachi Elevator Building  
Singapore 608597  
Tel: (65) 6416 1711  
<http://www.hea.hitachi.com.sg>

Distributor

Specifications and designs in this catalogue are subjected to change without notice.



Printed on recycled paper. Please recycle.

HEA-007(5) 1118 (PIS)

**Dimensions and reaction loading (for 1 elevator)**

Based on EN81-1:1998, HKG-COP and KFB (Kuwait) regulations (with fire rated door)

No.	Rated load (kg)	Per-sons	Rated speed (m/min)	Model	Door OP width (mm)	Car inside a x b (mm)	Hoistway X x Y (mm)	Machine room		Machine room and pit reaction loading (kN)								
								S x T (mm)	u	R1	R2	R3	R4					
1	450	6	60	VFI-450-CO60	800	1400 x 850	1850 x 1465	2300x 2555 (2300 x 2755)	255	43	25	72 (81)	63 (71)					
2	550	7	60	VFI-550-CO60		1400 x 1000	1850 x 1630	1850 x 1630	2300 x 2470 (2300 x 2670)	120	46	27	80 (90)	69 (78)				
3			90	VFI-550-CO90					2400 x 2420 (2400 x 2620)	70	49	29	87 (90)	76 (79)				
4			105	VFI-550-CO105									87 (107)	76 (93)				
5			600	8					60	VFI-600-CO60	1400 x 1050	1850 x 1700	2300 x 2470 (2300 x 2670)	70	47	28	83 (93)	71 (80)
6	90	VFI-600-CO90				2400 x 2420 (2400 x 2620)	20	50	29	90 (93)				78 (81)				
7	105	VFI-600-CO105								90 (110)				78 (96)				
8	700	9	60	VFI-700-CO60		1400 x 1200	1850 x 1850	2300 x 2500 (2300 x 2700)	-	51	30	93 (105)	89 (96)					
9			90	VFI-700-CO90					2400 x 2500 (2400 x 2700)	-	54	32	100 (103)	86 (89)				
10			105	VFI-700-CO105									100 (122)	86 (106)				
11	750	10	60	VFI-750-CO60	1400 x 1300	1850 x 1950	2300 x 2550 (2300 x 2750)	-	52	31	96 (108)	81 (91)						
12			90	VFI-750-CO90				2400 x 2550 (2400 x 2750)	-	55	32	102 (106)	88 (93)					
13			105	VFI-750-CO105								102 (126)	88 (110)					
14			120	VFI-750-CO120								1900 x 2060	2300 x 3400	-	105	61	155 (149)	134 (134)
15			150	VFI-750-CO150														
16	900	12	60	VFI-900-CO60	900	1600 x 1300	2050 x 2000	2550x 2750 (2550 x 2950)	-	57	33	109 (122)	91 (102)					
17			90	VFI-900-CO90			2100 x 2050	2650x 2750 (2650 x 2950)	-	61	36	115 (120)	98 (101)					
18			105	VFI-900-CO105								115 (142)	98 (120)					
19			120	VFI-900-CO120								2100 x 2060	2500 x 3400	-	108	64	159 (159)	138 (142)
20			150	VFI-900-CO150														
21	1000	13	60	VFI-1000-CO60	900 [1000]	1600 x 1450 [1600 x 1400]	2050 x 2150 [2250 x 2150]	2550x 2800 (2550 x 3000)	-	58 (59)	34 (35)	114 (128)	94 (105)					
22			90	VFI-1000-CO90			2100 x 2200 [2250 x 2200]	2650x 2800 (2650 x 3000)	-	63	37	120 (125)	101 (104)					
23			105	VFI-1000-CO105								120 (148)	101 (124)					
24			120	VFI-1000-CO120								2100 x 2210 [2250 x 2210]	2500 x 3550	-	110	67	165 (165)	142 (146)
25			150	VFI-1000-CO150														
26	1150	15	60	VFI-1150-CO60	1000	1600 x 1600	2090 x 2260 [2250 x 2260]	2450 x 3600	-	112	70	158 (192)	133 (169)					
27			90	VFI-1150-CO90			2100 x 2310 [2250 x 2310]	2500 x 3650	-			125	78	198 (207)	169 (179)			
28			105	VFI-1150-CO105						2520 x 2210	2900 x 3550			-	120	75	172 (205)	144 (177)
29			120	VFI-1150-CO120														
30	150	VFI-1150-CO150																
31	1350	18	60	VFI-1350-CO60	1100	2000 x 1500	2520 x 2210	2900 x 3500	-	125	78	198 (207)	169 (179)					
32			90	VFI-1350-CO90			2520 x 2210	2900 x 3550	-			125	78	198 (207)	169 (179)			
33			105	VFI-1350-CO105						2520 x 2210	2900 x 3550			-	125	78	198 (207)	169 (179)
34			120	VFI-1350-CO120														
35			150	VFI-1350-CO150														
36	1600	21	60	VFI-1600-CO60	1100	2000 x 1700	2520 x 2410	2900 x 3750	-	125	80	205 (223)	171 (198)					
37			90	VFI-1600-CO90			2520 x 2460	2900 x 3800	-			131	83	213 (226)	179 (202)			
38			105	VFI-1600-CO105														
39			120	VFI-1600-CO120														
40			150	VFI-1600-CO150														

( ): For Kuwait fire brigade regulations. [ ]: Alternative size.

HEA-007-1(5) 1118 (PIS)

**Dimensions and reaction loading (for 1 elevator)**

Based on SS550 and Malaysia regulations (with fire rated door)

No.	Rated load (kg)	Per-sons	Rated speed (m/min)	Model	Door OP width (mm)	Car inside a x b (mm)	Hoistway X x Y (mm)	Machine room		Machine room and pit reaction loading (kN)									
								S x T (mm)	u	R1	R2	R3	R4						
1	450	6	60	VFI-450-CO60	800	1400 x 850	1850 x 1465	2300 x 2555	255	43	25	81	71						
2	550	8	60	VFI-550-CO60		1400 x 1030	1850 x 1630	1850 x 1630	2300 x 2440	90	46	27	90	78					
3			90	VFI-550-CO90					2400 x 2390	40	49	29	90	79					
4			105	VFI-550-CO105									107	93					
5			600 (615)	9					60	VFI-600-CO60 (VFI-615-CO60)	1400 x 1150	1850 x 1750	2300 x 2450	-	47	28	93	80	
6	90	VFI-600-CO90 (VFI-615-CO90)				2400 x 2450	-	50	29	93				81					
7	105	VFI-600 CO105 (VFI-615-CO105)								110				96					
8	700	10	60	VFI-700-CO60		1400 x 1250	1850 x 1850	2300 x 2500	-	51	30	105	89						
9			90	VFI-700-CO90					2400 x 2500	-	54	32	103	89					
10			105	VFI-700-CO105									122	106					
11	750	11	60	VFI-750-CO60	900 (800)	1350 x 1400 (1400x1350)	2050x 2000 (1850 x 1950)	2550 x 2600 (2300 x 2550)	-	52	31	108	94						
12			90	VFI-750-CO90			2050 x 2050 (1850 x 2000)	2650 x 2600 (2400 x 2550)	-	55	32	106	93						
13			105	VFI-750-CO105								126	110						
14			120	VFI-750-CO120								2100 x 2110 (1900 x 2060)	2350 x 3450 (2300 x 3400)	-	105	61	149	134	
15			150	VFI-750-CO150															
16	900	13	60	VFI-900-CO60	1600 x 1400	2050 x 2050	2550 x 2800	-	57	33	122	102							
17			90	VFI-900-CO90				2100 x 2100	2650 x 2800	-	61	36	120	101					
18			105	VFI-900-CO105									142	120					
19			120	VFI-900-CO120									2100 x 2110	2500 x 3450	-	108	64	159	142
20			150	VFI-900-CO150															
21	1000 (1025)	15	60	VFI-1000-CO60 (VFI-1025-CO60)	900	1600 x 1550	2050 x 2200	2550 x 2850	-	59	35	128	106						
22			90	VFI-1000-CO90 (VFI-1025-CO90)			2100 x 2250	2650 x 2850	-	63	37	125	104						
23			105	VFI-1000-CO105 (VFI-1025-CO105)								148	124						
24			120	VFI-1000-CO120 (VFI-1025-CO120)								2100 x 2260	2500 x 3600	-	110	67	165	146	
25			150	VFI-1000-CO150 (VFI-1025-CO150)															
26	1150	17	60	VFI-1150-CO60	1000	1600 x 1700	2090 x 2360	2450 x 3700	-	112	70	155	101						
27			90	VFI-1150-CO90			2100 x 2410	2500 x 3750	-			125	78	207	179				
28			105	VFI-1150-CO105						2520 x 2210	2700 x 3550			-	120	73	194	171	
29			120	VFI-1150-CO120															
30	150	VFI-1150-CO150																	
31	1350	20	60	VFI-1350-CO60	1100	2000 x 1550	2520 x 2210	2900 x 3550	-	125	78	207	179						
32			90	VFI-1350-CO90			2520 x 2260	2900 x 3600	-			125	78	207	179				
33			105	VFI-1350-CO105						2520 x 2260	2900 x 3600			-	125	78	207	179	
34			120	VFI-1350-CO120															
35			150	VFI-1350-CO150															
36	1600	23	60	VFI-1600-CO60	1100	2000 x 1750	2520 x 2410	2900 x 3750	-	125	80	209	124						
37			90	VFI-1600-CO90			2520 x 2460	2900 x 3800	-			131	83	223	198				
38			105	VFI-1600-CO105															
39			120	VFI-1600-CO120															
40			150	VFI-1600-CO150															

( ): For Malaysia use only.

## Dimensions and reaction loading (for 1 elevator)

Based on Hitachi standard (without fire rated door)

No.	Rated load (kg)	Persons	Rated speed (m/min)	Model	Door OP width (mm)	Car inside	Hoistway	Machine room	Machine room and pit reaction loading (KN)						
						a x b (mm)	X x Y (mm)	S x T (mm)	u	R1	R2	R3	R4		
1	450	6	60	VFI-450-CO60	800	1400 x 850	1780 x 1465	2300 x 2555	255	43	25	81	71		
2			60	VFI-550-CO60		1400 x 1030	1780 x 1630	2300 x 2440	90	46	27	90	78		
3	550	8	90	VFI-550-CO90			1850 x 1680	2400 x 2390	40	49	29	90	79		
4			105	VFI-550-CO105								107	93		
5			60	VFI-600-CO60		1400 x 1100	1780 x 1700	2300 x 2420	20	47	28	93	80		
6	600	9	90	VFI-600-CO90			1850 x 1750	2400 x 2400	-	50	29	93	81		
7			105	VFI-600-CO105								110	96		
8			60	VFI-700-CO60		1400 x 1250	1780 x 1850	2300 x 2500	-	51	30	105	89		
9	700	10	90	VFI-700-CO90			1850 x 1900	2400 x 2500	-	54	32	103	89		
10			105	VFI-700-CO105								122	106		
11			60	VFI-750-CO60		1400 x 1350	1780 x 1950	2300 x 2550	-	52	31	108	94		
12			90	VFI-750-CO90			1850 x 2000	2400 x 2550	-	55	32	106	93		
13	750	11	105	VFI-750-CO105								126	110		
14			120	VFI-750-CO120											
15			150	VFI-750-CO150			1900 x 2060	2300 x 3400	-	105	61	149	134		
16			60	VFI-900-CO60	900	1600 x 1350	2000 x 2000	2550 x 2750	-	57	33	122	102		
17			90	VFI-900-CO90								120	101		
18	900	13	105	VFI-900-CO105			2100 x 2050	2550 x 2750	-	61	36				
19			120	VFI-900-CO120								142	120		
20			150	VFI-900-CO150			2100 x 2060	2500 x 3400	-	108	64	159	142		
21			60	VFI-1000-CO60		1600 x 1500	2000 x 2150	2550 x 2800	-	59	35	128	106		
22	1000	15	90	VFI-1000-CO90			2100 x 2200	2650 x 2800	-	63	37	125	104		
23			105	VFI-1000-CO105								148	124		
24			120	VFI-1000-CO120			2100 x 2210	2500 x 3550	-	110	67	165	146		
25			150	VFI-1000-CO150											
26			60	VFI-1150-CO60	1000	1600 x 1600	2090 x 2260	2450 x 3600	-			155	101		
27			90	VFI-1150-CO90								112	70		
28	1150	17	105	VFI-1150-CO105			2100 x 2310	2500 x 3650	-				192	169	
29			120	VFI-1150-CO120											
30			150	VFI-1150-CO150			1800 x 1500	2300 x 2210	2700 x 3550	-	120	73	194	171	
31			60	VFI-1350-CO60	1100	2000 x 1500	2520 x 2160	2900 x 3500	-			172	111		
32			90	VFI-1350-CO90								120	75	205	171
33	1350	20	105	VFI-1350-CO105			2520 x 2210	2900 x 3550	-						
34			120	VFI-1350-CO120								125	78	207	179
35			150	VFI-1350-CO150											
36			60	VFI-1600-CO60	1100	2000 x 1750	2520 x 2410	2900 x 3750	-			209	124		
37			90	VFI-1600-CO90								125	80		
38	1600	24	105	VFI-1600-CO105			2520 x 2460	2900 x 3800	-				223	198	
39			120	VFI-1600-CO120											
40			150	VFI-1600-CO150								131	83	226	202


## Electrical Information

### Wiring diagram

— shows the works to be done by others.

Pit lightings, including wiring and piping, are to be provided by others (minimum 200 lux at floor level). Power socket outlet, including wiring and piping in pit, are to be provided by others.

Item	Work to be provided by others
Main power supply (*)	To install facilities to ensure that power does not fluctuate outside the range of -10% to +5% of the normal voltage rating and to ensure that the unbalance factor of voltage does not exceed 5%.
Lighting power supply (*)	To provide lighting power supply for car lighting indicators and maintenance work.
Interphone	To provide pipes and wiring located outside hoistway. To provide 12 interphone wires of 0.9mm <sup>2</sup> / elevator.
Ventilation	To provide mechanical ventilation to the machine room to ensure that the temperature in the machine room is maintained at below 38°C.
Pit light, power outlet	To provide single-phase AC 200V, 10A power outlet and pit lighting with switch below the entrance floor level for maintenance purposes.

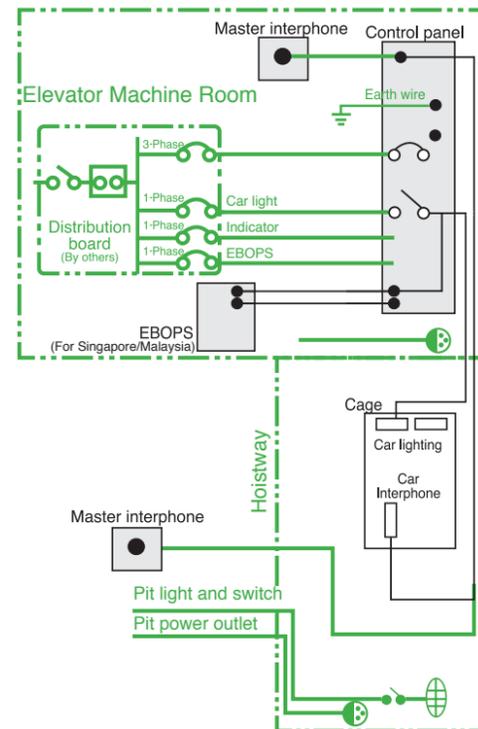

(\*) Main and lighting supply shall lead into the elevator machine room.

## Electrical data

Required capacity of circuit breaker, transformer and starting power at building side.

No.	Model	Rated load (kg)	Rated speed (m/min)	Electrical data (For 1 elevator unless specified)							
				Motor capacity (kW)	Main supply voltage (3-phase) (V)	Circuit breaker capacity per unit (A)	Transformer capacity (kVA)			Starting power (kVA/ unit)	Calorific value for 1 lift (kcal/ hr)
							1 unit	2 units	3 units		
1	VFI-450-CO60	450	60	4.5	200-220 380-480	32 20	4	7	9	13	600
2	VFI-550-CO60		60	4.5	200-220 380-480	32 20	5	7	10	14	734
3	VFI-550-CO90		90	6.7	200-220 380-480	40 20	6	10	13	18	1100
4	VFI-550-CO105		105	7.8	200-220 380-415 440-480	40 32 20	6	11	15	20	1284
5	VFI-600-CO60 (VFI-615-CO60)		60	4.5	200-220 380-480	40 20	5	8	11	15	800 (820)
6	VFI-600-CO90 (VFI-615-CO90)		90	6.7	200-220 380-480	40 20	6	10	14	19	1200 (1230)
7	VFI-600-CO105 (VFI-615-CO105)		105	7.8	200-220 380-415 440-480	40 32 20	7	11	15	22	1400 (1435)
8	VFI-700-CO60		60	5.5	200-220 380-480	40 20	5	9	12	17	934
9	VFI-700-CO90		90	8.3	200-220 380-415 440-480	40 32 20	7	11	15	22	1400
10	VFI-700-CO105		105	9.7	200-220 380-415 440-480	50 40 20	8	13	17	24	1634
11	VFI-750-CO60		60	5.5	200-415 380-480	40 20	6	9	12	17	1000
12	VFI-750-CO90		90	8.3	200-220 380-415 440-480	50 32 20	7	12	16	23	1500
13	VFI-750-CO105		105	9.7	200-220 380-415 440-480	50 40 32	8	13	18	26	1750
14	VFI-750-CO120		120	11	200-220 380-415 440-480	63 40 32	8	13	18	29	2000
15	VFI-750-CO150		150	14	200-220 380-480	75 40	10	16	22	36	2500
16	VFI-900-CO60		60	5.9	200-220 380-480	40 20	6	10	14	20	1200
17	VFI-900-CO90		90	8.9	200-220 380-480	50 32	8	14	19	26	1800
18	VFI-900-CO105		105	10.4	200-220 380-415 440-480	63 40 32	8	14	19	30	2100
19	VFI-900-CO120		120	11.8	200-220 380-480	63 40	9	15	21	33	2400
20	VFI-900-CO150		150	14.7	200-220 380-480	75 40	11	19	25	40	3000
21	VFI-1000-CO60 (VFI-1025-CO60)		60	6.7	200-220 380-480	40 20	7	11	15	21	1334 (1367)
22	VFI-1000-CO90 (VFI-1025-CO90)		90	10.2	200-220 380-480	63 40	8	13	18	28	2000 (2050)
23	VFI-1000-CO105 (VFI-1025-CO105)		105	11.7	200-220 380-480	63 40	9	15	20	32	2334 (2392)
24	VFI-1000-CO120 (VFI-1025-CO120)		120	14	200-220 380-480	75 40	10	17	23	36	2667 (2734)
25	VFI-1000-CO150 (VFI-1025-CO150)		150	17	200-220 380-415 440-480	75 50 40	12	20	28	44	3334 (3417)
26	VFI-1150-CO60		60	7.5	200-220 380-415 440-480	50 32 20	7	12	16	23	1534
27	VFI-1150-CO90		90	11.2	200-220 380-480	63 40	9	15	20	32	2300
28	VFI-1150-CO105		105	13	200-220 380-480	75 40	10	17	23	36	2684
29	VFI-1150-CO120		120	15	200-220 380-480	75 40	11	19	25	41	3067
30	VFI-1150-CO150		150	18.5	200-220 380-480	100 50	14	23	31	50	3834
31	VFI-1350-CO60		60	9	200-220 380-480	50 32	8	13	18	26	1800
32	VFI-1350-CO90		90	13	200-220 380-480	75 40	10	17	23	36	2700
33	VFI-1350-CO105		105	15	200-220 380-415 440-480	75 50 40	11	19	26	42	3150
34	VFI-1350-CO120		120	17.5	200-220 380-415 440-480	100 50 40	13	21	29	47	3600
35	VFI-1350-CO150		150	22	200-220 380-415 440-480	125 63 50	16	26	36	58	4500
36	VFI-1600-CO60		60	10.5	200-220 380-415 440-480	63 40 32	8	14	19	30	2134
37	VFI-1600-CO90		90	15.5	200-220 380-415 440-480	75 50 40	12	19	26	42	3200
38	VFI-1600-CO105		105	18	200-220 380-415 440-480	100 50 40	13	22	30	48	3734
39	VFI-1600-CO120		120	21	200-220 380-415 440-480	125 63 50	15	25	34	55	4267
40	VFI-1600-CO150		150	26	200-220 380-415 440-480	125 75 63	18	31	42	67	5334

( ): For Malaysia use only.

**Dimensions and reaction loading (for 1 elevator)**

Based on Hitachi standard (without fire rated door)

No.	Rated load (kg)	Persons	Rated speed m/s (m/min)	Model	Door OP width (mm)	Car inside	Hoistway	Machine room		Machine room and pit reaction loading (KN)												
						a x b (mm)	X x Y (mm)	S x T (mm)	u	R1	R2	R3	R4									
1	450	6	1.0 (60)	VFI-450-CO60	800	1400 x 850	1780 x 1465	2300 x 2555	255	43	25	81	71									
2	550	8	1.0 (60)	VFI-550-CO60		1400 x 1030	1780 x 1630	2300 x 2440	90	46	27	90	78									
3			1.5 (90)	VFI-550-CO90										1850 x 1680	2400 x 2390	40	49	29	90	79		
4			1.75 (105)	VFI-550-CO105																	107	93
5			1.0 (60)	VFI-600-CO60										1400 x 1100	1780 x 1700	2300 x 2420	20	47	28	93		
6	1.5 (90)	VFI-600-CO90	1850 x 1750	2400 x 2400		-	50	29	93	81												
7	1.75 (105)	VFI-600-CO105									110	96										
8	700	10	1.0 (60)	VFI-700-CO60		1400 x 1250	1780 x 1850	2300 x 2500	-	51			30	105	89							
9			1.5 (90)	VFI-700-CO90							1850 x 1900	2400 x 2500				-	54	32	103	89		
10			1.75 (105)	VFI-700-CO105																	122	106
11	750	11	1.0 (60)	VFI-750-CO60		1400 x 1350	1780 x 1950	2300 x 2550	-	52	31	108	94									
12			1.5 (90)	VFI-750-CO90										1850 x 2000	2400 x 2550	-	55	32	106	93		
13			1.75 (105)	VFI-750-CO105																	126	110
14			2.0 (120)	VFI-750-CO120																		
15			2.5 (150)	VFI-750-CO150																		
16	900	13	1.0 (60)	VFI-900-CO60	1600 x 1350	2000 x 2000	2550 x 2750	-	57	33	122	102										
17			1.5 (90)	VFI-900-CO90									2100 x 2050	2550 x 2750	-	61	36	120	101			
18			1.75 (105)	VFI-900-CO105																2100 x 2060	2500 x 3400	-
19			2.0 (120)	VFI-900-CO120																		
20	2.5 (150)	VFI-900-CO150																				
21	1000	15	1.0 (60)	VFI-1000-CO60	900	1600 x 1500	2000 x 2150	2550 x 2800	-	59	35	128	106									
22			1.5 (90)	VFI-1000-CO90										2100 x 2200	2650 x 2800	-	63	37	125	104		
23			1.75 (105)	VFI-1000-CO105																	148	124
24			2.0 (120)	VFI-1000-CO120																		
25			2.5 (150)	VFI-1000-CO150																		
26	1150	17	1.0 (60)	VFI-1150-CO60	900	1600 x 1600	2090 x 2260	2450 x 3600	-	112	70	155	101									
27			1.5 (90)	VFI-1150-CO90										2100 x 2310	2500 x 3650	-	112	70	192	169		
28			1.75 (105)	VFI-1150-CO105																	192	169
29			2.0 (120)	VFI-1150-CO120																		
30	2.5 (150)	VFI-1150-CO150																				
31	1350	20	1.0 (60)	VFI-1350-CO60	1100	2000 x 1500	2520 x 2160	2900 x 3500	-	120	75	172	111									
32			1.5 (90)	VFI-1350-CO90										2520 x 2210	2900 x 3550	-	125	78	207	179		
33			1.75 (105)	VFI-1350-CO105																	205	177
34			2.0 (120)	VFI-1350-CO120																		
35			2.5 (150)	VFI-1350-CO150																		
36	1600	24	1.0 (60)	VFI-1600-CO60	1100	2000 x 1750	2520 x 2410	2900 x 3750	-	125	80	209	124									
37			1.5 (90)	VFI-1600-CO90										2520 x 2460	2900 x 3800	-	131	83	226	202		
38			1.75 (105)	VFI-1600-CO105																	223	198
39			2.0 (120)	VFI-1600-CO120																		
40			2.5 (150)	VFI-1600-CO150																		


**Dimensions and reaction loading (for 1 elevator)**

Based on India regulations (with fire rated door)

No.	Rated load (kg)	Persons	Rated speed m/s (m/min)	Model	Door OP width (mm)	Car inside	Hoistway	Machine room		Machine room and pit reaction loading (kN)												
						a x b (mm)	X x Y (mm)	S x T (mm)	u	R1	R2	R3	R4									
1	480 <sup>(*)</sup>	7	1.0 (60)	VFI-450-CO60	800	1400 x 850	1850 x 1465	2300 x 2555	255	43	25	81	71									
2	550 <sup>(*)</sup>	8	1.0 (60)	VFI-550-CO60		1400 x 1030	1850 x 1630	2300 x 2440	90	46	27	90	78									
3			1.5 (90)	VFI-550-CO90										1850 x 1680	2400 x 2390	40	49	29	90	79		
4			1.75 (105)	VFI-550-CO105																	107	93
5			1.0 (60)	VFI-630-CO60										1400 x 1100	1850 x 1700	2300 x 2420	20	47	28	93		
6	1.5 (90)	VFI-630-CO90	1850 x 1750	2400 x 2400		-	50	29	93	80												
7	1.75 (105)	VFI-630-CO105									110	96										
8	700 <sup>(*)</sup>	10	1.0 (60)	VFI-700-CO60		1400 x 1250	1850 x 1850	2300 x 2500	-	51			30	105	89							
9			1.5 (90)	VFI-700-CO90							1850 x 1900	2400 x 2500				-	54	32	103	89		
10			1.75 (105)	VFI-700-CO105																	122	106
11	750 <sup>(*)</sup>	11	1.0 (60)	VFI-750-CO60		1400 x 1350	1850 x 1950	2300 x 2550	-	52	31	108	94									
12			1.5 (90)	VFI-750-CO90										1850 x 2000	2400 x 2550	-	55	32	106	93		
13			1.75 (105)	VFI-750-CO105																	126	110
14			2.0 (120)	VFI-750-CO120																		
15			2.5 (150)	VFI-750-CO150																		
16	900 <sup>(*)</sup>	13	1.0 (60)	VFI-900-CO60	1600 x 1350	2050 x 2000	2550 x 2750	-	57	33	122	102										
17			1.5 (90)	VFI-900-CO90									2100 x 2050	2650 x 2750	-	61	36	120	101			
18			1.75 (105)	VFI-900-CO105																2100 x 2060	2500 x 3400	-
19			2.0 (120)	VFI-900-CO120																		
20	2.5 (150)	VFI-900-CO150																				
21	1050 <sup>(*)</sup>	15	1.0 (60)	VFI-1050-CO60	900	1600 x 1500	2050 x 2150	2550 x 2800	-	59	35	128	106									
22			1.5 (90)	VFI-1050-CO90										2100 x 2200	2650 x 2800	-	63	37	125	104		
23			1.75 (105)	VFI-1050-CO105																	148	124
24			2.0 (120)	VFI-1050-CO120																		
25			2.5 (150)	VFI-1050-CO150																		
26	1150	17	1.0 (60)	VFI-1150-CO60	900	1600 x 1600	2090 x 2260	2450 x 3600	-	112	70	155	101									
27			1.5 (90)	VFI-1150-CO90										2100 x 2310	2600 x 3650	-	112	70	192	169		
28			1.75 (105)	VFI-1150-CO105																	192	169
29			2.0 (120)	VFI-1150-CO120																		
30	2.5 (150)	VFI-1150-CO150																				
31	1350 <sup>(*)</sup>	19	1.0 (60)	VFI-1350-CO60	1100	2000 x 1500	2520 x 2160	2900 x 3500	-	120	75	172	111									
32			1.5 (90)	VFI-1350-CO90										2520 x 2210	2900 x 3550	-	125	78	207	179		
33			1.75 (105)	VFI-1350-CO105																	205	177
34			2.0 (120)	VFI-1350-CO120																		
35			2.5 (150)	VFI-1350-CO150																		
36	1600 <sup>(*)</sup>	23	1.0 (60)	VFI-1600-CO60	1100	2000 x 1750	2520 x 2410	2900 x 3750	-	125	80	209	124									
37			1.5 (90)	VFI-1600-CO90										2520 x 2460	2900 x 3800	-	131	83	226	202		
38			1.75 (105)	VFI-1600-CO105																	223	198
39			2.0 (120)	VFI-1600-CO120																		
40			2.5 (150)	VFI-1600-CO150																		

(\*) Complied with IS 14665.

## Other Information

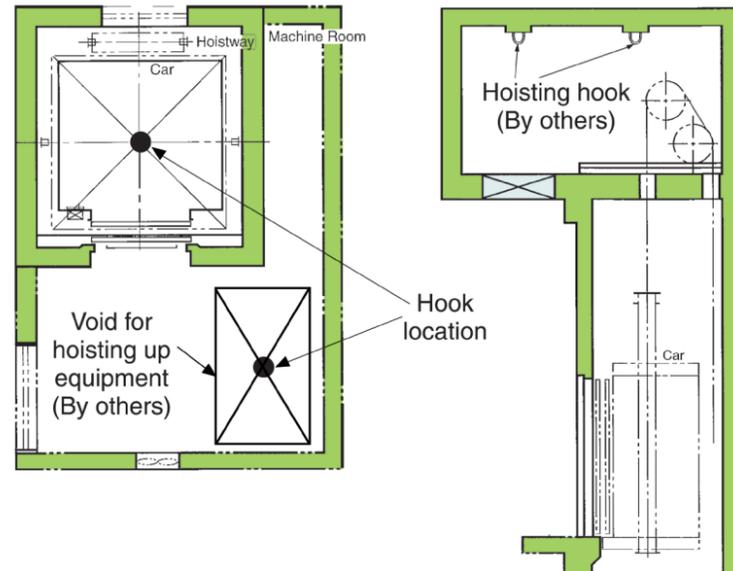

When building contractor provides the temporary void on the machine room floor for hoisting up elevator equipment, building contractor shall provide an additional suspension hook, positioned directly above the center of the void. (For details, please consult with Hitachi.)


## Electrical Information

### Wiring diagram

shows the works to be done by others. Pit lightings, including wiring and piping, are to be provided by others (minimum 200 lux at floor level). Power socket outlet, including wiring and piping in pit, are to be provided by others.

Item	Work to be provided by others
Main power supply <sup>(*)</sup>	To install facilities to ensure that power does not fluctuate outside the range of -10% to +5% of the normal voltage rating and to ensure that the unbalance factor of voltage does not exceed 5%.
Lighting power supply <sup>(*)</sup>	To provide lighting power supply for car lighting indicators and maintenance work.
Interphone	To provide pipes and wiring located outside hoistway. To provide 12 interphone wires of 0.9mm <sup>2</sup> / elevator.
Ventilation	To provide mechanical ventilation to the machine room to ensure that the temperature in the machine room is maintained at below 38°C.
Pit light, power outlet	To provide single-phase AC 200V, 10A power outlet and pit lighting with switch below the entrance floor level for maintenance purposes.

(\*) Main and lighting supply shall lead into the elevator machine room.

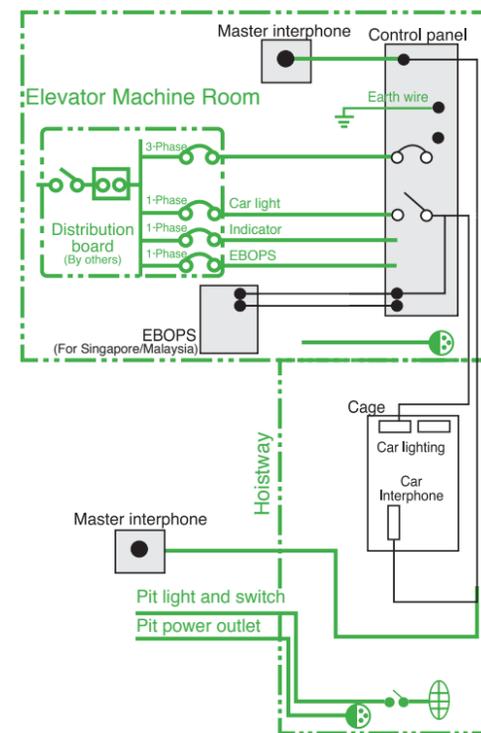

### Electrical data

Required capacity of circuit breaker, transformer and starting power at building side.

No.	Model	Rated load (kg)	Rated speed m/s (m/min)	Electrical data (For 1 elevator unless specified)							
				Motor capacity (kW)	Main supply voltage (3-phase) (V)	Circuit breaker capacity per unit (A)	Transformer capacity (kVA)			Starting power (kVA/ unit)	Calorific value for 1 lift (kcal/ hr)
							1 unit	2 units	3 units		
1	VFI-450-CO60 (VFI-480-CO60)	450 (480)	1.0 (60)	4.5	200-220 380-480	32 20	4	7	9	13	600 (640)
2	VFI-550-CO60		1.0 (60)	4.5	200-220 380-480	32 20	5	7	10	14	734
3	VFI-550-CO90		1.5 (90)	6.7	200-220 380-480	40 20	6	10	13	18	1100
4	VFI-550-CO105		1.75 (105)	7.8	200-220 380-415 440-480	40 32 20	6	11	15	20	1284
5	VFI-600-CO60 (VFI-630-CO60)		1.0 (60)	4.5	200-220 380-480	40 20	5	8	11	15	800 (840)
6	VFI-600-CO90 (VFI-630-CO90)		1.5 (90)	6.7	200-220 380-480	40 20	6	10	14	19 (20)	1200 (1260)
7	VFI-600-CO105 (VFI-630-CO105)		1.75 (105)	7.8	200-220 380-415 440-480	40 32 20	7	11 (12)	15 (16)	22	1400 (1470)
8	VFI-700-CO60		1.0 (60)	5.5	200-220 380-480	40 20	5	9	12	17	934
9	VFI-700-CO90		1.5 (90)	8.3	200-220 380-415 440-480	40 32 20	7	11	15	22	1400
10	VFI-700-CO105		1.75 (105)	9.7	200-220 380-415 440-480	50 40 20	8	13	17	24	1634
11	VFI-750-CO60		1.0 (60)	5.5	200-415 380-480	40 20	6	9	12	17	1000
12	VFI-750-CO90		1.5 (90)	8.3	200-220 380-415 440-480	50 32 20	7	12	16	23	1500
13	VFI-750-CO105		1.75 (105)	9.7	200-220 380-415 440-480	50 40 32	8	13	18	26	1750
14	VFI-750-CO120		2.0 (120)	11	200-220 380-415 440-480	63 40 32	8	13	18	29	2000
15	VFI-750-CO150		2.5 (150)	14	200-220 380-480	75 40	10	16	22	36	2500
16	VFI-900-CO60		1.0 (60)	5.9	200-220 380-480	40 20	6	10	14	20	1200
17	VFI-900-CO90		1.5 (90)	8.9	200-220 380-480	50 32	8	14	19	26	1800
18	VFI-900-CO105		1.75 (105)	10.4	200-220 380-415 440-480	63 40 32	8	14	19	30	2100
19	VFI-900-CO120		2.0 (120)	11.8	200-220 380-480	63 40	9	15	21	33	2400
20	VFI-900-CO150		2.5 (150)	14.7	200-220 380-480	75 40	11	19	25	40	3000
21	VFI-1000-CO60 (VFI-1050-CO60)		1.0 (60)	6.7	200-220 380-480	40 20	7	11	15 (16)	21 (22)	1334 (1400)
22	VFI-1000-CO90 (VFI-1050-CO90)		1.5 (90)	10.2	200-220 380-480	63 40	8	13 (14)	18	28 (29)	2000 (2100)
23	VFI-1000-CO105 (VFI-1050-CO105)		1.75 (105)	11.7	200-220 380-480	63 40	9	15	20 (21)	32 (33)	2334 (2450)
24	VFI-1000-CO120 (VFI-1050-CO120)		2.0 (120)	14	200-220 380-480	75 40	10	17	23	36	2667 (2800)
25	VFI-1000-CO150 (VFI-1050-CO150)		2.5 (150)	17	200-220 380-415 440-480	75 50 40	12	20	28	44	3334 (3500)
26	VFI-1150-CO60		1.0 (60)	7.5	200-220 380-415 440-480	50 32 20	7	12	16	23	1534
27	VFI-1150-CO90		1.5 (90)	11.2	200-220 380-480	63 40	9	15	20	32	2300
28	VFI-1150-CO105		1.75 (105)	13	200-220 380-480	75 40	10	17	23	36	2684
29	VFI-1150-CO120		2.0 (120)	15	200-220 380-480	75 40	11	19	25	41	3067
30	VFI-1150-CO150		2.5 (150)	18.5	200-220 380-480	100 50	14	23	31	50	3834
31	VFI-1350-CO60		1.0 (60)	9	200-220 380-480	50 32	8	13	18	26	1800
32	VFI-1350-CO90		1.5 (90)	13	200-220 380-480	75 40	10	17	23	36	2700
33	VFI-1350-CO105		1.75 (105)	15	200-220 380-415 440-480	75 50 40	11	19	26	42	3150
34	VFI-1350-CO120		2.0 (120)	17.5	200-220 380-415 440-480	100 50 40	13	21	29	47	3600
35	VFI-1350-CO150		2.5 (150)	22	200-220 380-415 440-480	125 63 50	16	26	36	58	4500
36	VFI-1600-CO60		1.0 (60)	10.5	200-220 380-415 440-480	63 40 32	8	14	19	30	2134
37	VFI-1600-CO90		1.5 (90)	15.5	200-220 380-415 440-480	75 50 40	12	19	26	42	3200
38	VFI-1600-CO105		1.75 (105)	18	200-220 380-415 440-480	100 50 40	13	22	30	48	3734
39	VFI-1600-CO120		2.0 (120)	21	200-220 380-415 440-480	125 63 50	15	25	34	55	4267
40	VFI-1600-CO150		2.5 (150)	26	200-220 380-415 440-480	125 75 63	18	31	42	67	5334

( ): For India use only.